



Autoswing
on Rotex Pro
only



- Perfect heat & pressure distribution
- single manual swing plate of 40x50 cm
- Manual rotation on One & Lite
- Automatic rotation on Pro v2

User friendly :

- * Complete lateral clearance of the plate
- * Automatic opening by electromagnet (Lite & Pro only)
- * Reversible C-shaped part & Quick Release

- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials
- Ideal for small to medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating element



Set programs



QuickRelease®
system



GPX 3200W
(Pro version)



Pre-heat time




Electromagnetic
(Lite & Pro version)


OPTIONAL ACCESSORIES



Support table




DTG plate



Set of 4 plates




Laser pointer




Teflon Sheet



Nomex® cover



Shoe plate



Height indicator

Email

sales@sefa.fr
support@sefa.fr
www.sefa.fr

Phone

Office : + 33 4 68 74 05 89
Fax : + 33 4 68 74 24 08

Address

SEFA SAS
Z.I. PASTABRAC
11 260 ESPERAZA (FR)

TECHNICAL CHARACTERISTICS

Type	Electromagnetic (Rotex Lite & Pro) Manual (Rotex One)
Operation	Swing - Rotating plate Autoswing on Rotex Pro
Platen size	40x50 cm / 16x20"
Max thickness	17 mm
Weight	81 Kg
Pressure	590 gr/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500 W (One & Lite) 3200 W (Pro)
Power supply	240 V Single-phase
Amperage	11 A (One & Lite) 14 A (Pro)
Applications	Direct to Garment, Flex, Textile Sublimation, Laser Transfer, Screen Printing
Dimensions	759x909x569 mm 30x36x22"

SETTINGS




Electronics developed by Sefa

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.
 Double timer (main + pre-heat)
 2 cycle counters
 3 settable programs
 Stop cycle function
 From 0 to 570 sec (precision +/- 1%).
 From 0 to 220°C (precision +/- 1%).
 Heating time to reach 180°C : 15 min.


OPTIONAL ACCESSORIES



TAB-98 LITE
Support table




PLA-DRY M
Sponge plate to dry pretreated clothes.




PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.




CROI-161
Laser system to place your transfers with more precision (1 extra laser can be added).



PLA-SHOES-CV
Special plate that fits textile and sport shoes (side and back).



HOU-50
Heat resistant Nomex® cover for easier threading and protection.




ROTEX-IND
Full version of the Rotex with height indicator (can't be added separately).



180° reversible
C-shaped lower
part with Quick
Release system

DIMENSIONS

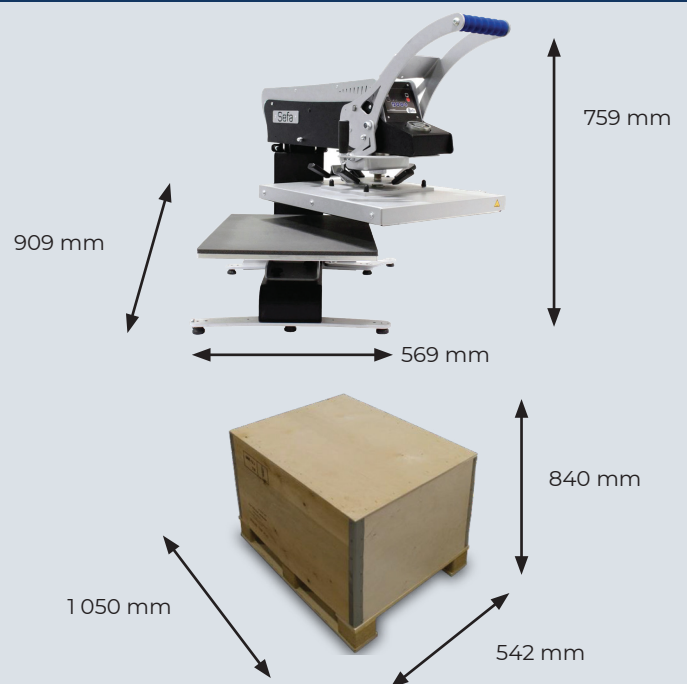

Box weight CAI-100 : 25 kg